

## Submersible Residual Water Pumps

### BRL400S

- With the minimum water level of 4 mm or over, this pump starts to operate and continues to pump out residual water until the water level reaches 1 to 2 mm.
- Even if the motor section is exposed in the air, this pump can be operated continuously because of its full headrace construction.
- If necessary, this pump can be used as an ordinary pump since it has a sufficient capacity given from its  $\phi 50$ .
- Rubber-protected stand of this pump hardly cause to FRP-made bottom face of water holding tanks, etc.
- As a standard accessory, this pump is equipped with  $\phi 25$  one-touch control back flow preventive handle cock.



#### Applications

- For discharging residual water from elevated water tanks for buildings, condominiums, etc.
- For discharging residual water from pits of every kind.
- For discharging residual water from swimming pools.
- For discharging water from underpasses, river improvement work sites, etc.
- For discharging residual water from construction sites.




## Standard Specifications

Bore (mm)	Model	Phase	Output (kW)	Capacity—Total Head		Poles	Weight (kg)
				m <sup>3</sup> /min—m			
				50Hz	60Hz		
25	BRL400S	Single	0.4	0.1—6	0.1—6	2	9.5
50				0.15—6	0.15—6		



## Standard Accessories

- Cable [5m] ..... 1
- Back-flow prevention cock ..... 1 (for 25mm dia.)
- Hose coupling ..... 1 (for 50mm dia.)

## Dimensions

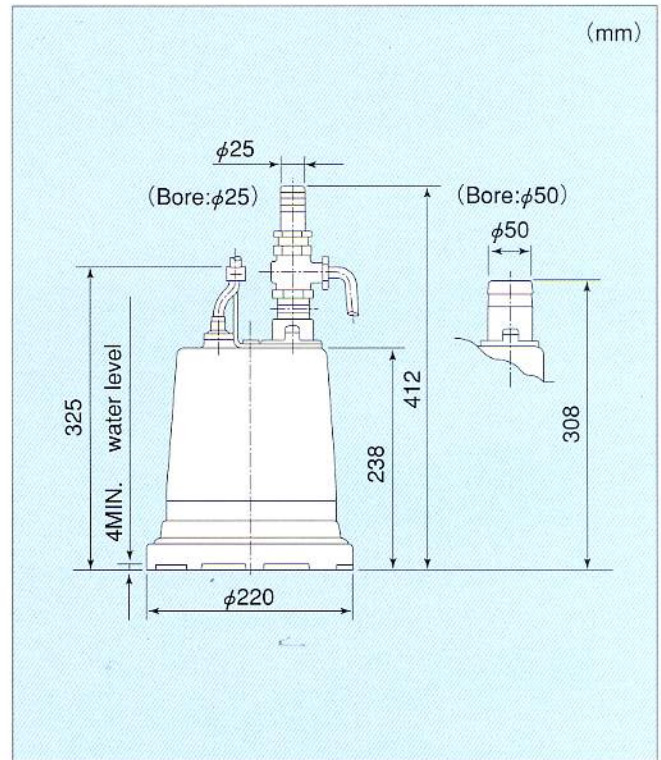

## Performance Curves

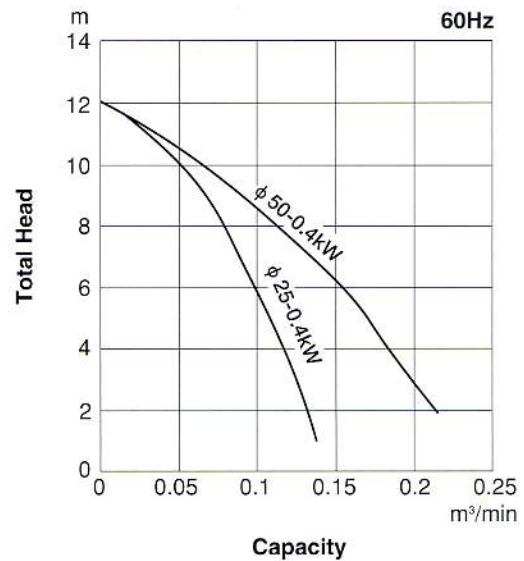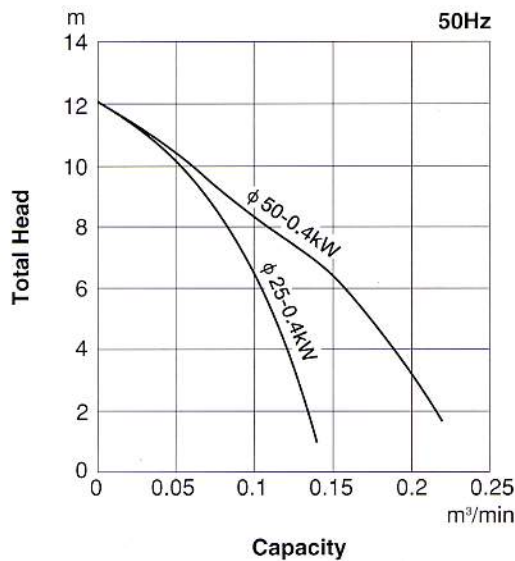

Specifications and dimensions are subject to change without notice.

### ShinMaywa Industries, Ltd.

Overseas Operations Department 2-43, Shitte 3-chome, Tsurumi-ku, Yokohama 230-0003, Japan  
 Telephone : +81-45-584-1321 Facsimile : +81-45-584-1320  
 e-mail : overseas@sb.shinmaywa.co.jp

### ShinMaywa (America), Ltd.

10737 Gateway West, Suite 112  
 El Paso, Texas 79935, U.S.A.  
 Telephone : +1-915-594-9862  
 Facsimile : +1-915-594-9866  
 e-mail : salelpass@aol.com

### ShinMaywa (Malaysia) Sdn. Bhd.

Suite 7.3, 7th Floor Menara Aik Hua, Changkat  
 Raja Chulan, 50200 Kuala Lumpur, Malaysia.  
 Telephone : +60-3-2026-2388  
 Facsimile : +60-3-2026-2399  
 e-mail : smmsb@tm.net.my

### ShinMaywa (Asia) Pte. Ltd.

51 Goldhill Plaza #14-01  
 Singapore 308900  
 Telephone : +65-6224-0728  
 Facsimile : +65-6224-9678  
 e-mail : Asia.ad@shinmaywa.com.sg



ShinMaywa ONO PLANT

ISO 9001 (No. 956445) / ISO 14001 (No. 771888)